


Condensing units



TYWT04LY

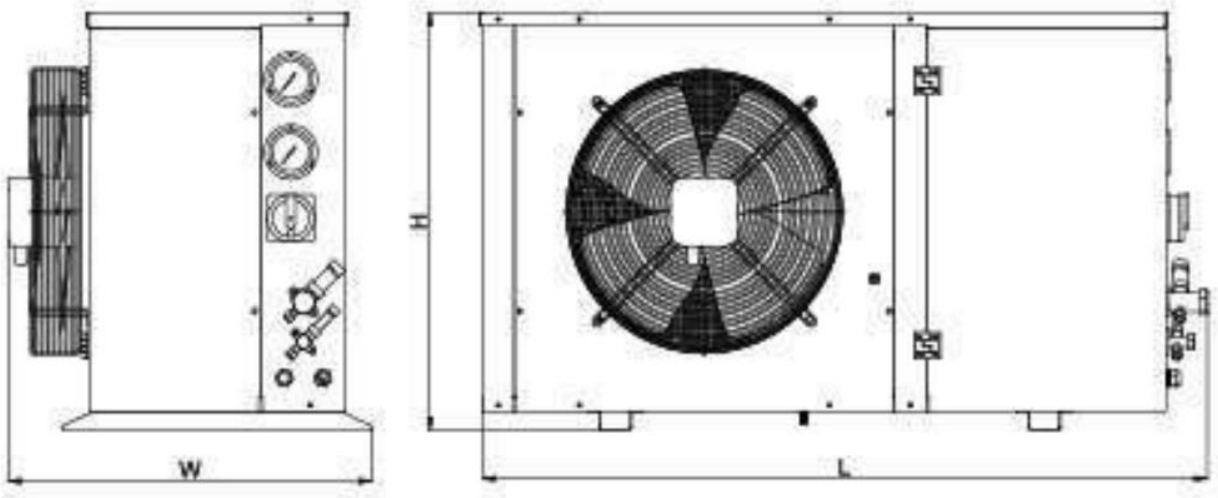

Model	Compressor		Condenser	Axial Fan Motor			Dimensions	Noise	Connect		Cooling capacity (watts)					
	Model	HP	Surface (m ²)	N°xΦ	Air flow m ³ /h	Voltage	LXWXH (mm)	Dist=10 m	D	S	Evaporating Temperature (°C)					
								dBa	Inch	Inch	-10°C	-15°C	-20°C	-25°C	-30°C	-35°C
TYWT04LY	TAG2516Z	4	24	1x450	3775	220V/50HZ	1120*570*633	40	3/8"	7/8"	9602	7593	5856	3708	3191	2264

50 Hz R404A

N°2564

4 T condensation	5 T evaporation	(°C)	-40	-35	-30	-25	-20	-15	-10
30	1 P refrigeration	(Watt)	1734	2618	3714	5045	6636	8510	10691
	2 P Absorption	(W)	1551	1939	2336	2747	3176	3625	4099
	3 I Absorption	(A)	3.53	3.93	4.37	4.86	5.40	5.99	6.62
40	1 P refrigeration	(Watt)	1161	1917	2846	3971	5316	6904	8759
	2 P Absorption	(W)	1439	1873	2319	2780	3258	3759	4285
	3 I Absorption	(A)	3.40	3.87	4.39	4.95	5.56	6.22	6.92
50	1 P refrigeration	(Watt)		1251	2006	2918	4011	5307	6831
	2 P Absorption	(W)		1735	2231	2743	3274	3829	4410
	3 I Absorption	(A)		3.69	4.28	4.91	5.59	6.32	7.09
60	1 P refrigeration	(Watt)			1229	1922	2756	3754	4940
	2 P Absorption	(W)			2061	2627	3214	3824	4463
	3 I Absorption	(A)			4.04	4.75	5.50	6.30	7.14

1 = cooling capacity 2 = power input 3 = current 4 = condensing temperature 5 = evaporating temperature